Sisal®

more than a carpet

Sisal® COMMERCIAL

Sisal® COMMERCIAL





Sisal COMMERCIAL

a Carpet

شرکت نوین سیزال صنعت به‌عنوان نماینده‌ی انحصاری محصولات سیزال آلمان فعالیت خود را در ایران از سال **1384** همگام با بالاترین کیفیت خدمات آغاز کرد. موکت‌های مرغوب سیزال در کارخانجات تراز اول اروپا و آمریکا توسط متخصصین سیزال در آلمان با نگاهی ظریف، انتخاب و پس از گذراندن آزمایش هایی گوناگونی نظیر: میزان مقاومت در برابر تردد، نور آفتاب، عدم گسترش دامنه آتش، انتشار دود و گازهای سمی در زمان حریق و سازگاری با گرمایش از کف به مخاطبین ارائه می‌شود. ما در سیزال بر این باور هستیم که انتخاب یک محصول یا خدمت نیازمند حصول اطمینان از رعایت استانداردهای لازم در آن زمینه است؛ از این رو همواره تلاش کرده‌ایم با ارائه خدمات بهتر در این راه پیشرو بوده و بیش از یک دهه است که بصورت علمی و تخصصی در تحقق بخشیدن به این مهم همت گماشته ایم. روند حرکتی سیزال از آغاز در راستای شعار شرکتی خود و بر مبنای یک رویکرد مدیریتی تخصصی ، به نحوی بنا نهاده شده که کلیه فرآیندها با هم‌افزایی دانش و تجربه بر اساس یک تفکر سیستماتیک، همخوان و هماهنگ، پیگیری شده و به مقصد برسد.

هم اکنون شرکت **نوین سیزال صنعت** با به سرانجام رساندن صدها پروژه بزرگ و کوچک دارای نام و آوازه ای پر افتخار است.

Sisal COMMERCIAL

The Element Of

مواد اولیه با کیفیت

بهترین مقاومت در برابر سایش

ثبات ابعادی عالی

بهترین عملکرد واکنش به آتش

پشتیبان منعطف

امکان طراحی بی پایان

طراحی مدرن

ترکیب رنگ و طرح های گوناگون

امکان چیدمان های متنوع

نصب راحت و آسان

عدم نیاز به چسب هنگام نصب موکت

کمترین میزان هدر رفت موکت هنگام برش و نصب

حمل و نقل و جابجایی آسان موکت



Sisal COMMERCIAL

Freedom

موکت تایل و انواع تجاری آن، علاوه بر اینکه در مقابل تردد بالا مقاوم و سازگار هستند، از نظر رنگ، طرح و ابعاد نیز دارای تنوع بالایی می باشند. با انتخاب رنگ و مدل های خلاقانه موکت نسبت به فضای مورد نظر میتوان ترکیب های بسیار مدرنی را ایجاد کرد که آشفتگی را از فضای شما گرفته و جسارت طراحی را به ذهن بیننده برساند. انتخاب عنصری هوشمندانه مانند موکت طراحی فضا را به سطح بالاتری می کشاند.



Sisal COMMERCIAL

Blur


95505


95585



95761


95504


95485


95106

Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Multi-Level Pattern Loop
Pile Material	100% eco solution Q® nylon
Pile Weight	610,30 g/m²
Pile Height	2,67 mm
Total Height	6,12 mm
Tuft Density	11,49 Kilotex
Permanently Antistatic	≤3,5 kv
Backing	ecoworx® tile
Dimension	45,72 x 91,44 cm
Dye Method	87% Solution Dyed / 13% Yarn Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes
Installation Method	 monolithic basketweave herringbone brick half basketweave boxed in

PVC-Free



Fade


95103


95106


95330


95761


95585


95485


95504


95505


95750


Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Multi-Level Pattern Loop
Pile Material	100% eco solution Q® nylon
Pile Weight	813,74 g/m²
Pile Height	3,05 mm
Total Height	6,68 mm
Tuft Density	13,41 Kilotex
Permanently Antistatic	< 3,5 kv
Backing	ecoworx® tile
Dimension	45,72 x 91,44 cm
Dye Method	100% Solution Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes

Installation Method


basketweave


herringbone


boxed in


brick


half basketweave

PVC-Free















Vertical Edge



67506


67555


67585


67586

Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Multi-Level Pattern Loop
Pile Material	100% eco solution Q® nylon
Pile Weight	745,93 g/m²
Pile Height	3,00 mm
Total Height	6,40 mm
Tuft Density	12,50 Kilotex
Permanently Antistatic	< 3,5 kv
Backing	ecoworx® tile
Dimension	45,72 x 91,44 cm
Dye Method	92% Solution Dyed / 8% Yarn Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes
Installation Method	 basketweave, herringbone, monolithic, half basketweave, brick, boxed in

PVC-Free



Ignite


48170


48481


48505


485516


48530



48531


48557

Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Multi-Level Pattern Loop
Pile Material	100% eco solution Q® nylon
Pile Weight	610,30 g/m^2
Pile Height	2,67 mm
Total Height	6,12 mm
Tuft Density	11,49 Kilotex
Permanently Antistatic	≤3,5 kv
Backing	ecoworx® tile
Dimension	45,72 x 91,44 cm
Dye Method	87% Solution Dyed / 13% Yarn Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes

Installation Method



PVC-Free



Dye Lab



41480



41496



41504



41516



41756



41517



41762




41906

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Cut Pile
Pile Material	100% eco solution Q®
Pile Weight	1.220,61 g/m²
Pile Height	4,45 mm
Total Height	8,38 mm
Tuft Density	13,79 Kilotex
Permanently Antistatic	≤ 3,5 kv
Backing	ecoworx® tile
Dimension	60,96 x 60,96 cm
Dye Method	100% Piece Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NFS 140	Yes (Gold Certified)
USGBC LEED	Contributes

Installation Method







Hexagon




54668 Plane




54326 Plane




54432 Plane




54505 Plane



54555 Plane




54595 Plane




85855 Plane



55530 Linear



55595 Linear




55505 Linear

Technical Specification

	Linear	Plane
Manufacturing Process	Tufted	Tufted
Gauge	1/12 Multi - Level Pattern Loop	1/12 Random Tip Shear
Pile Material	eco solution Q® nylon	eco solution Q® nylon
Pile Weight	678,11 g/m^2	745,93 g/m^2
Pile Height	3,02 mm	2,92 mm
Total Height	6,22 mm	6,50 mm
Tuft Density	11,27 Kilotex	12,82 Kilotex
Permanently Antistatic	≤ 3,5 kv	≤ 3,5 kv
Backing	eco works® tile	eco works® tile
Dimension	63,20 cm x 73,15 cm x 36,58 cm	63,20 cm x 73,15 cm x 36,58 cm
Dye Metho	70% Solution Dyed - 30% Yarn Dyed	100% Solution Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)	Yes (V3,1 Silver)
USGBC LEED	Conteributes	Conteributes
Radiant Panel	Class I	Class I
Nbs Smoke	Less Than 450	Less Than 450
Installation Method	 monolithic random diagonal	

PVC-Free

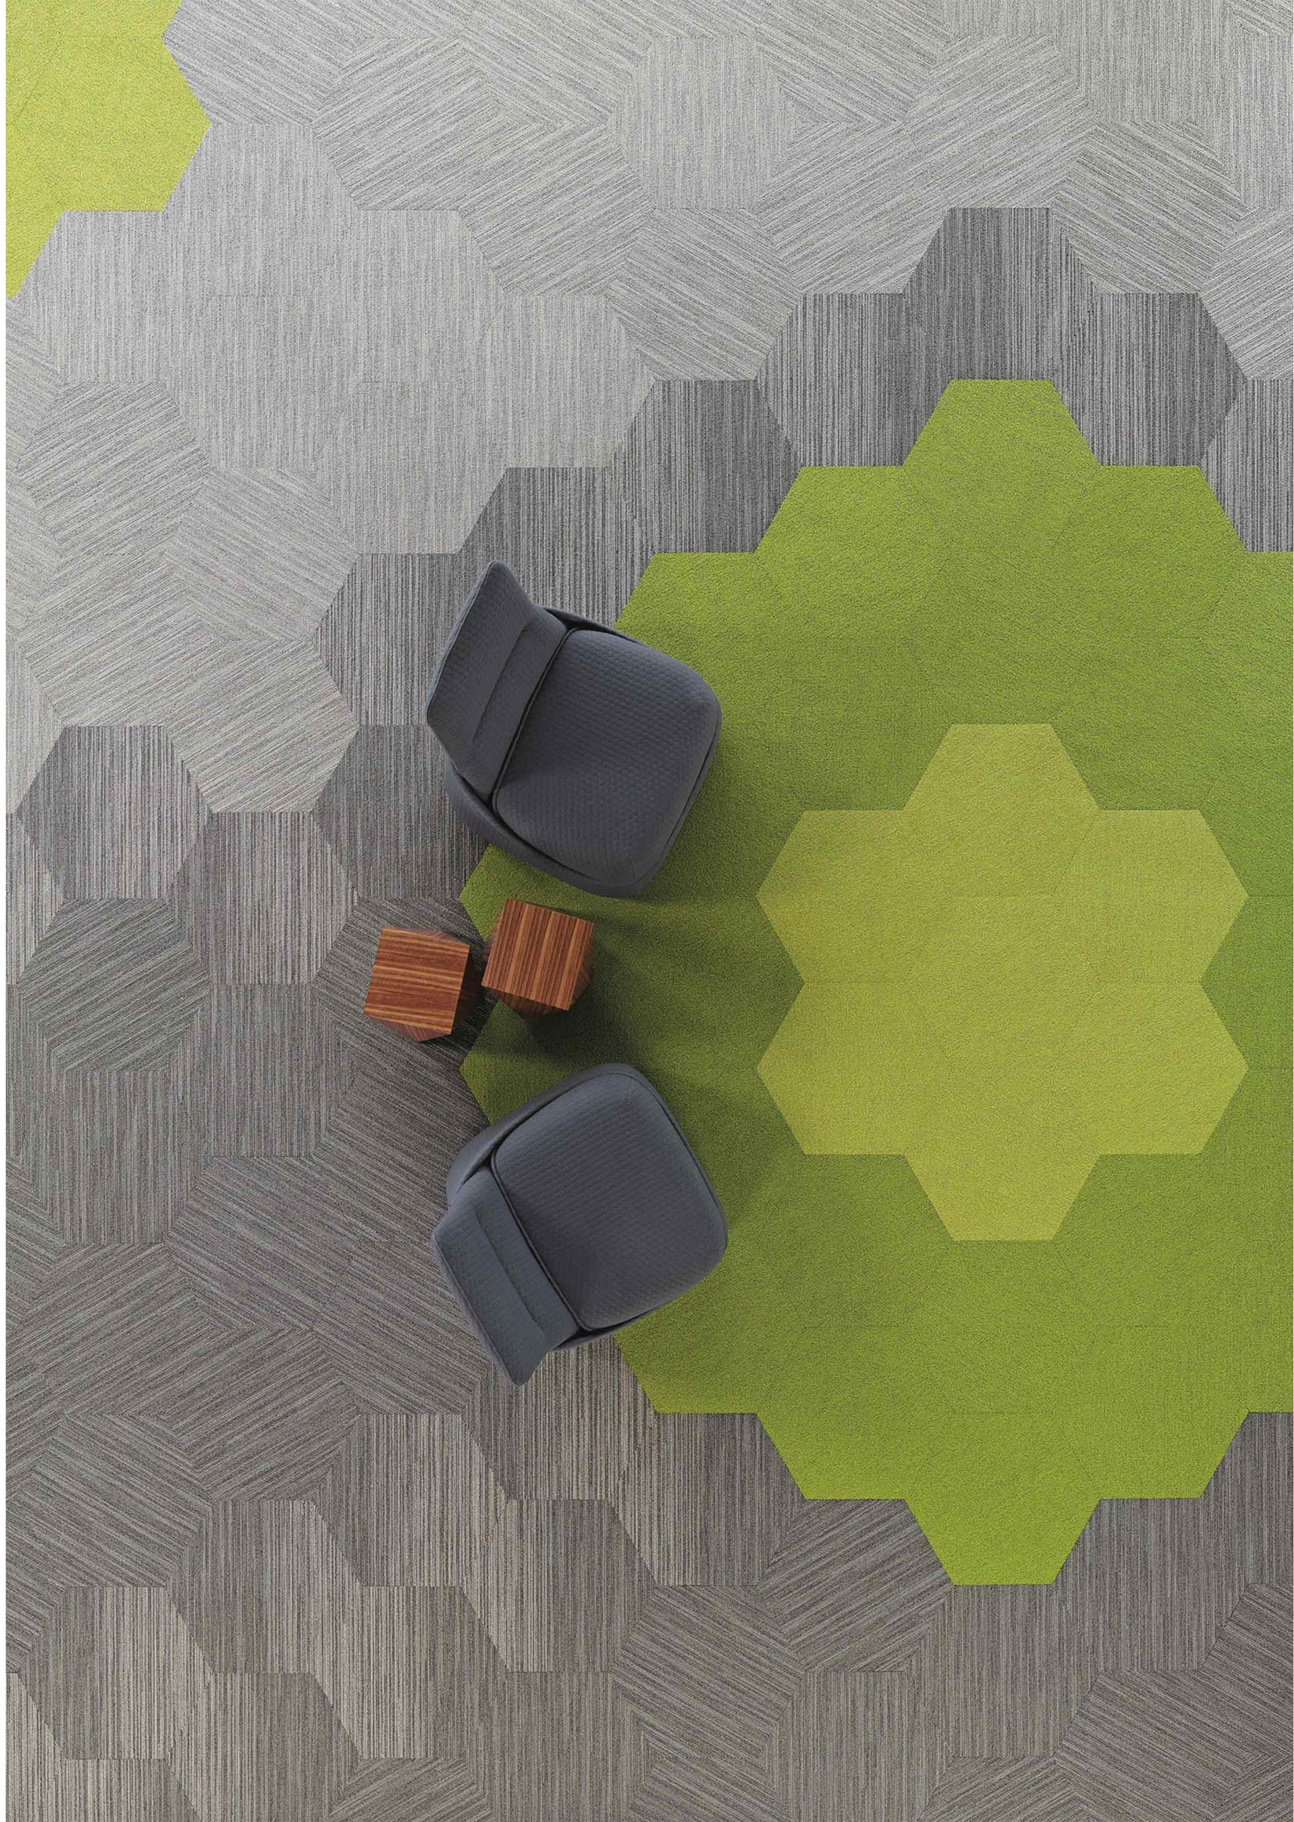


Color Pop



320



520



550



590




650



770


Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Multi-Level Pattern Loop
Pile Material	Eco solution Q® nylon
Pile Weight	542,49 g/m²
Pile Height	2,51 mm
Total Height	5,69 mm
Tuft Density	10,83 Kilotex
Permanently Antistatic	< 3,5 kv
Backing	Ecoworx® tile
Dimension	60,96 x 60,96 cm
Dye Method	100 % Solution Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes
Installation Method	







Tempt


18500


18504


18505


18585


18761



18485




Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Multi-Level Pattern Loop
Pile Material	100% eco solution Q® nylon
Pile Weight	542,49 g/m²
Pile Height	2,97 mm
Total Height	6,07 mm
Tuft Density	9,17 Kilotex
Permanently Antistatic	< 3,5 kv
Backing	ecoworx® tile
Dimension	60,96 x 60,96 cm
Dye Method	100% Solution Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes

Installation Method



PVC-Free

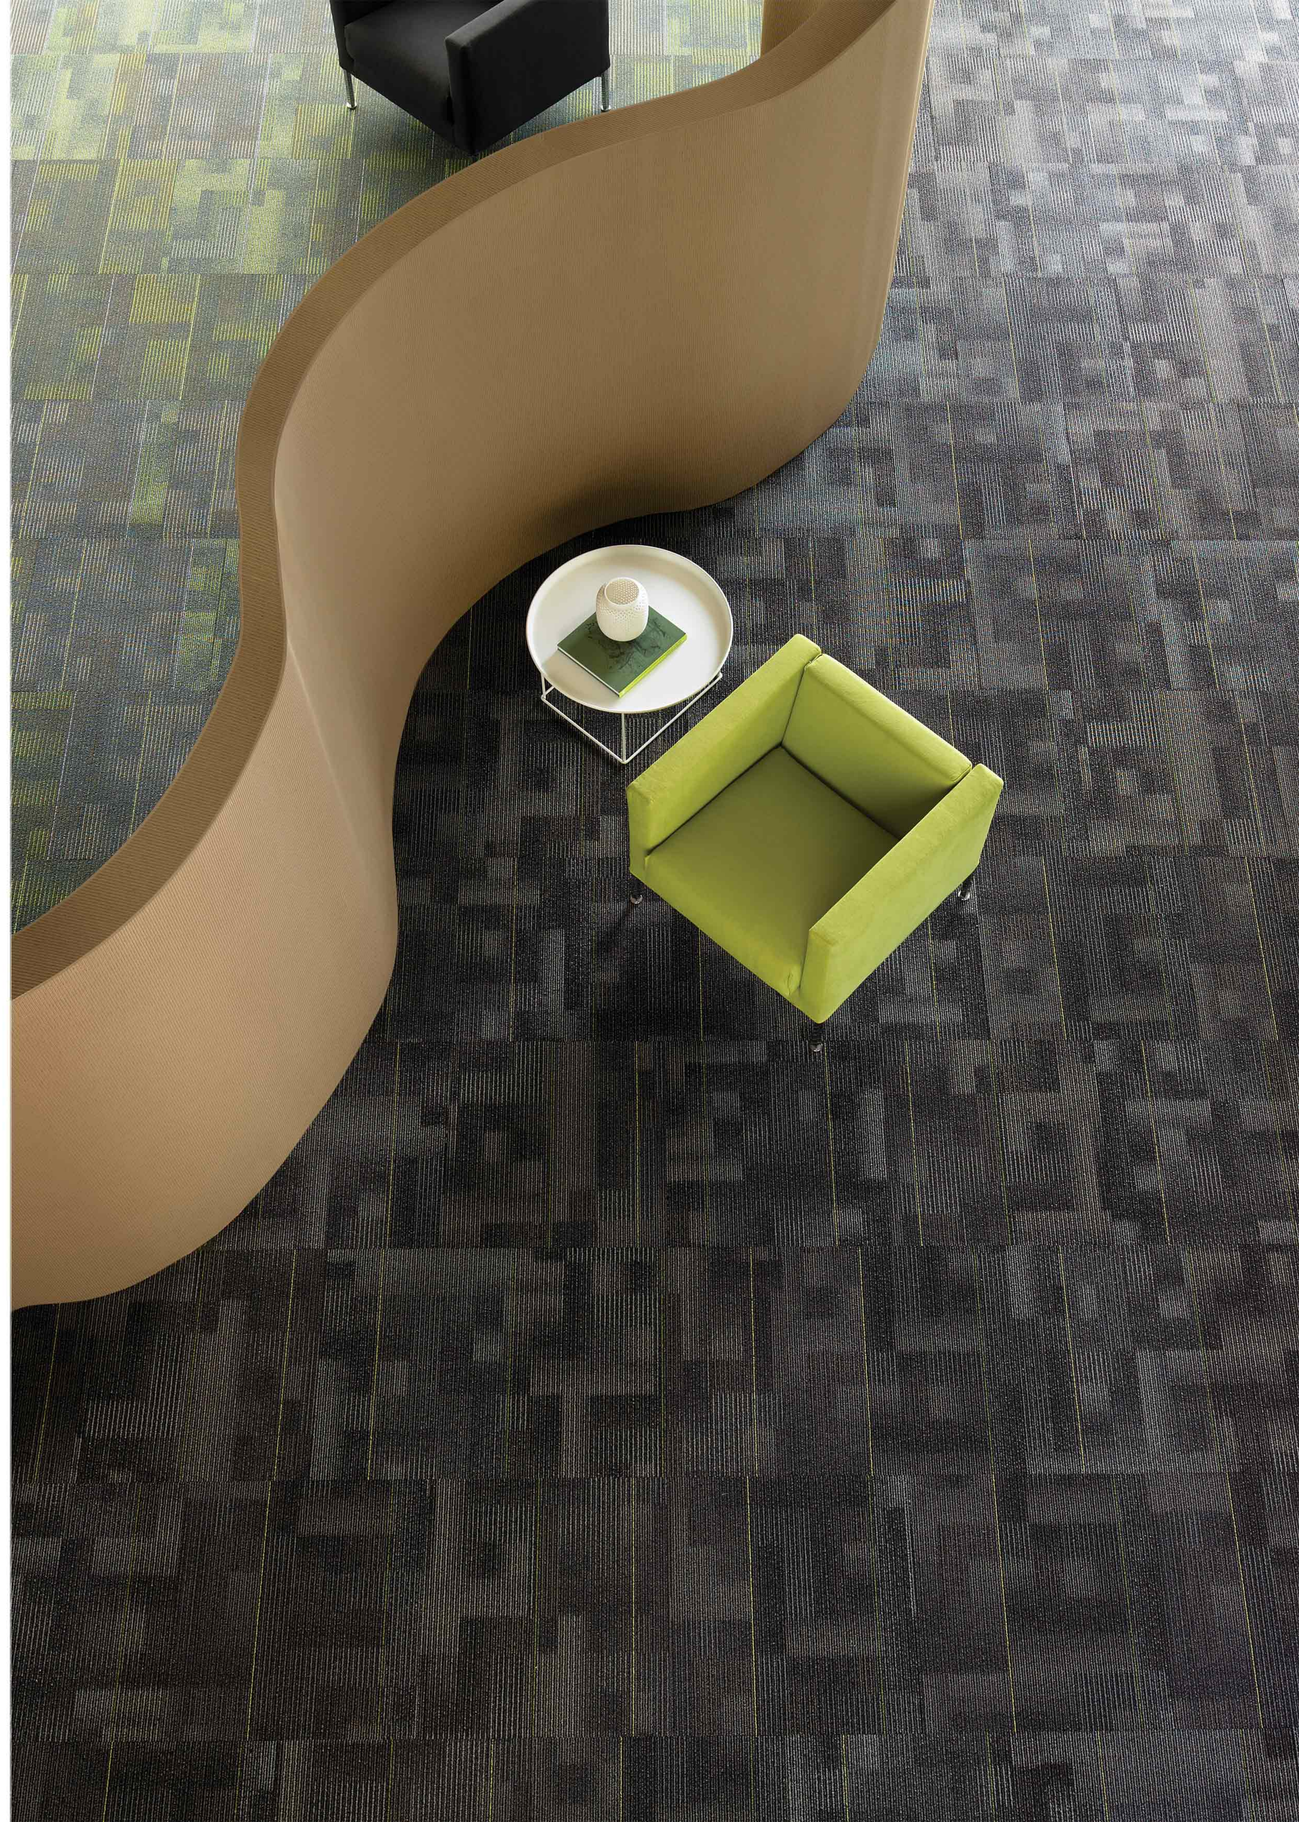

NATURE

is that teacher ...

















Sisal® COMMERCIAL

1398

راه اندازی بخش طراحی
موکت اختصاصی برای
اولین بار در ایران

1398

راه اندازه بخش سیستم های
ورودی و نظافتی پامیس

1397

طرح توسعه انبار سیزال
در سال ۹۷

انتقال شرکت به ساختمان سیزال

1398

افزایش تعداد کارکنان سیزال در بخش های جدید و نوپا به منظور استفاده و بهره گیری از استعداد های خلاق در حوزه های تخصصی و عمومی مرتبط

اعطای نمایندگی و افزایش
نمایندگان و عاملین فروش
شرکت نوین سیزال صنعت
در اقصی نقاط کشور

1398

گسترش بی سابقه دامنه
محصولات اداری شامل
موکت های تایل و رول

1392

تاسیس شعبه دوم از
فروشگاه های سیزال

شرکت در ده ها نمایشگاه مختلف
مربوط به صنعت ساختمان

1394

تاسیس شعبه سوم از
فروشگاه های سیزال

1390


تاسیس اولین شعبه از
فروشگاه های سیزال

ارائه و معرفی الیاف های طبیعی
سیزال و رونمایی از طیف وسیعی
از موکت های مرغوب هتلی


1384

تاسیس شرکت
نوین سیزال صنعت


First Blocks




572



912



930



993

Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Loop Pile
Pile Material	100% Polyamide 6
Pile Weight	600,0 g/m²
Total Weight	4.400 g/m²
Pile Height	3,1 mm
Total Height	6,8 mm
Tuft Density	174.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}s1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥ 7 ISO105-B02)
Thermal Resistance	Yes (0,064 m² K/W - ISO 8302)
Impact Noise Rating	Yes (ΔL 36 dB (1000 Hz) - ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method	





First Radiant



204



316



322



410



504




609



900

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Loop Pile
Pile Material	100% Polyamide 6 Aqualon
Pile Weight	540,0 g/m²
Total Weight	4.300 g/m²
Pile Height	2,9 mm
Total Height	6,4 mm
Tuft Density	156.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	B_{fl-s1}
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥ 7 ISO105-B02)
Thermal Resistance	Yes (0,047 m² K/W - ISO 8302)
Impact Noise Rating	Yes (ΔL 37 dB (1000 Hz) - ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method	









First Define




140




210



322




329



995



573



625




957



965

Technical Specifications


Manufacturing Process	Tufted
Gauge	1/12" Loop
Pile Material	100% Polyamide 6
Pile Weight	590,0 g/m²
Total Weight	4.500 g/m²
Pile Height	2,9 mm
Total Height	6,5 mm
Tuft Density	202.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}S1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥7 ISO 105-B02)
Thermal Resistance	Yes (0,066 m² K/W ISO 8302)
Impact Noise Rating	Yes (ΔL 25 dB (1000 Hz) ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method	







First Forward


140


210


329



573


625



817


957



961


990


Technical Specifications

Manufacturing Process	Tufted
Gauge	1/10 " Loop
Pile Material	100% Polyamide 6
Pile Weight	540,0 g/m²
Total Weight	4.300 g/m²
Pile Height	2,9 mm
Total Height	6,2 mm
Tuft Density	180.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}S1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥ 7 ISO 105-B02)
Thermal Resistance	Yes (0,062 m² K/W ISO 8302)
Impact Noise Rating	Yes (ΔL_w 26 dB (1000 Hz) ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method	



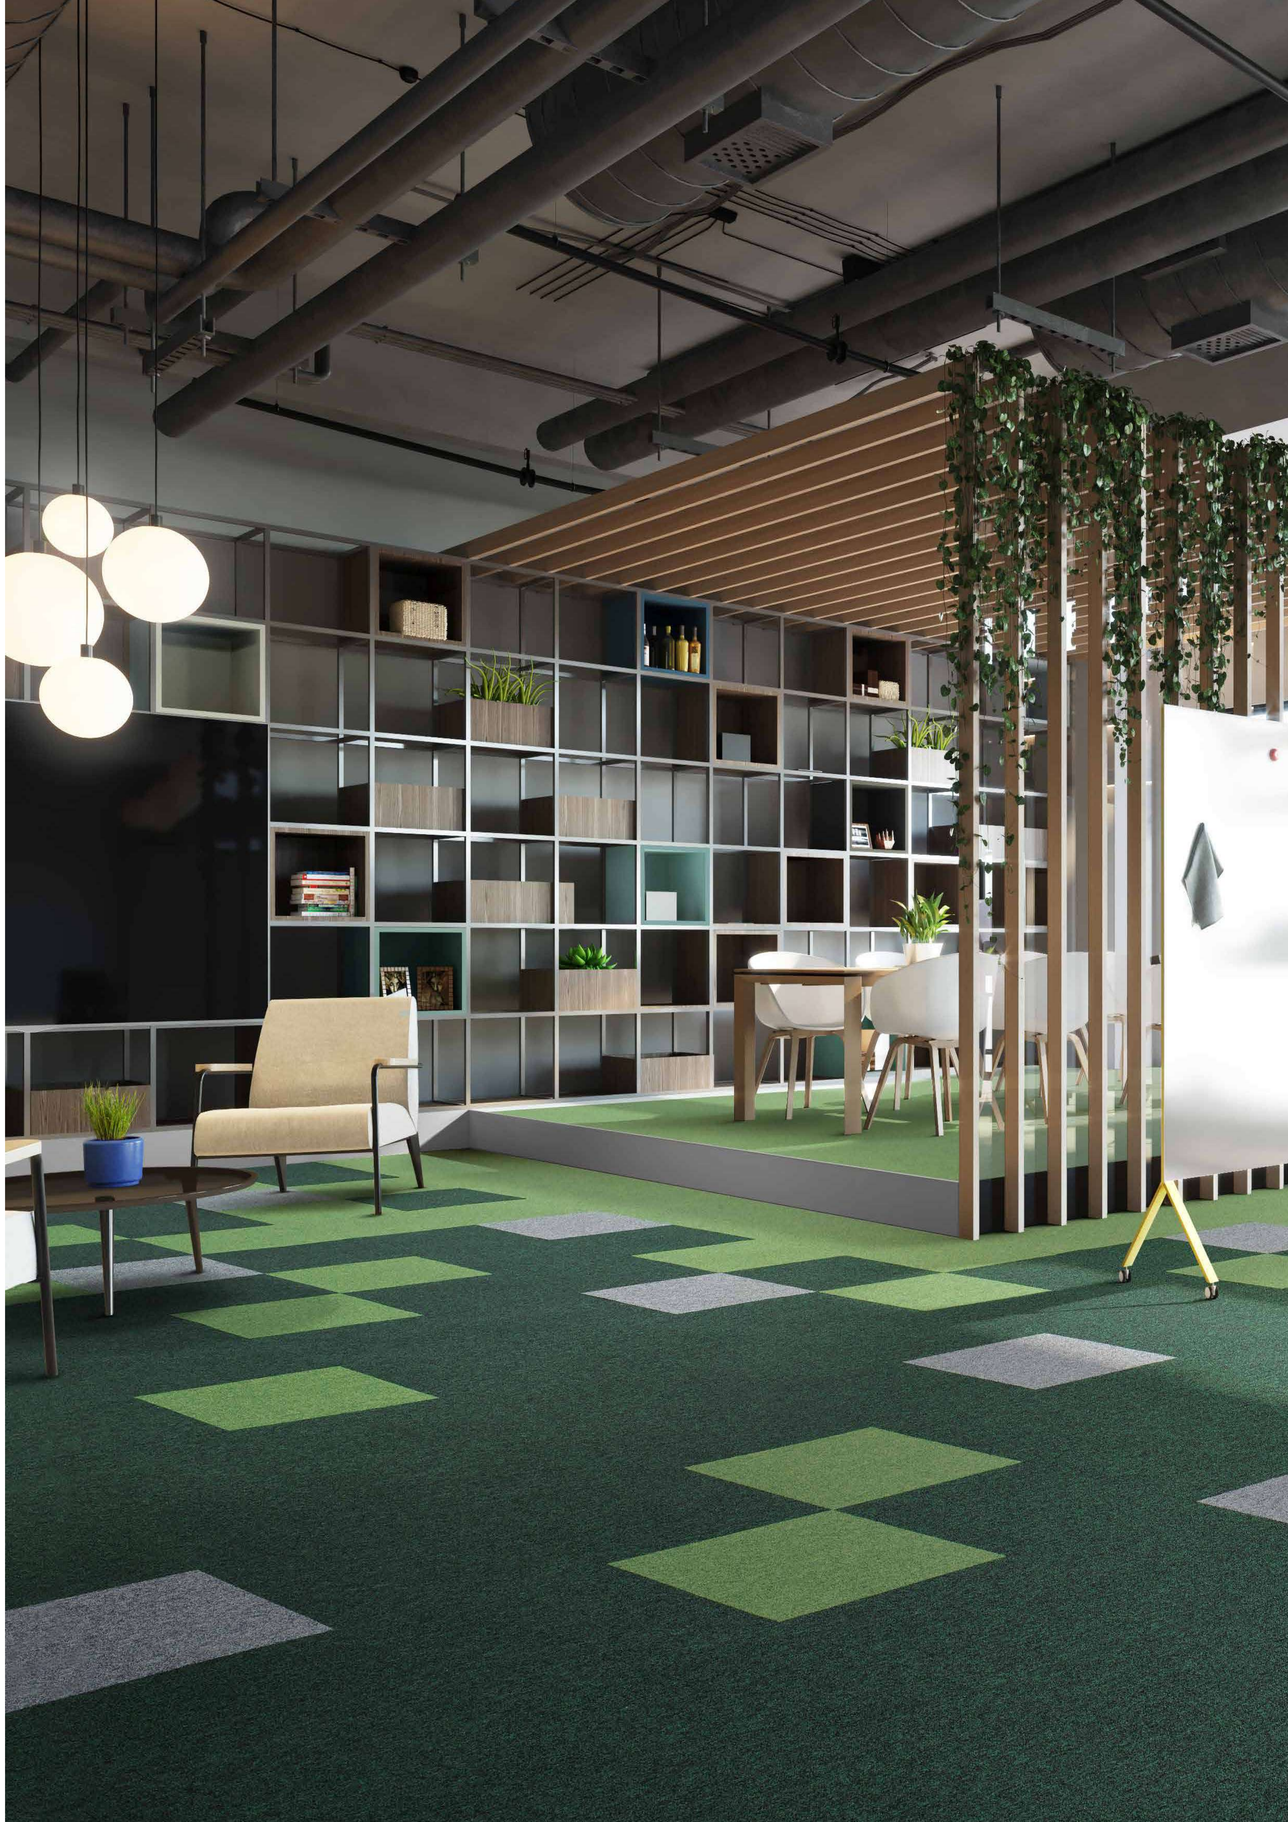

First Straightline


990


992



993


995


996


997

Technical Specifications

Manufacturing Process	Tufted
Gauge	1/10 " Loop
Pile Material	100% Polyamide 6
Pile Weight	540,0 g/m²
Total Weight	4.300 g/m²
Pile Height	2,9 mm
Total Height	6,2 mm
Tuft Density	180.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}S1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥ 7 ISO 105-B02)
Thermal Resistance	Yes (0,062 m² K/W ISO 8302)
Impact Noise Rating	Yes (ΔL_w 26 dB (1000 Hz) ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method	





Step/ First



21F



25F



60F




30F




41F



50F



961 _ First



990 _ First

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Loop Pile
Pile Material	100% Polyamide 6 Aqualon
Pile Weight	530,0 g/m²
Total Weight	4.300 g/m²
Pile Height	2,8 mm
Total Height	6,0 mm
Tuft Density	160.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}s1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Piece Dyed
Fastness to Light	Yes (≥ 5-6 ISO 105-B02)
Thermal Resistance	Yes (0,053 m² K/W ISO 8302)
Impact Noise Rating	Yes (ΔL 33 dB (1000 Hz) ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes



Installation Method







Patchwork



351



592



610



830



957



965


Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Loop Pile
Pile Material	100% Polyamide 6
Pile Weight	605,0 g/m²
Total Weight	4.400 g/m²
Pile Height	3,1 mm
Total Height	6,6 mm
Tuft Density	218.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}s1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	Printed
Fastness to Light	Yes (≥ 5-6 ISO105-B02)
Thermal Resistance	Yes (0,063 m² K/W - ISO 8302)
Impact Noise Rating	Yes (ΔL 32 dB (1000 Hz) - ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes

Installation Method





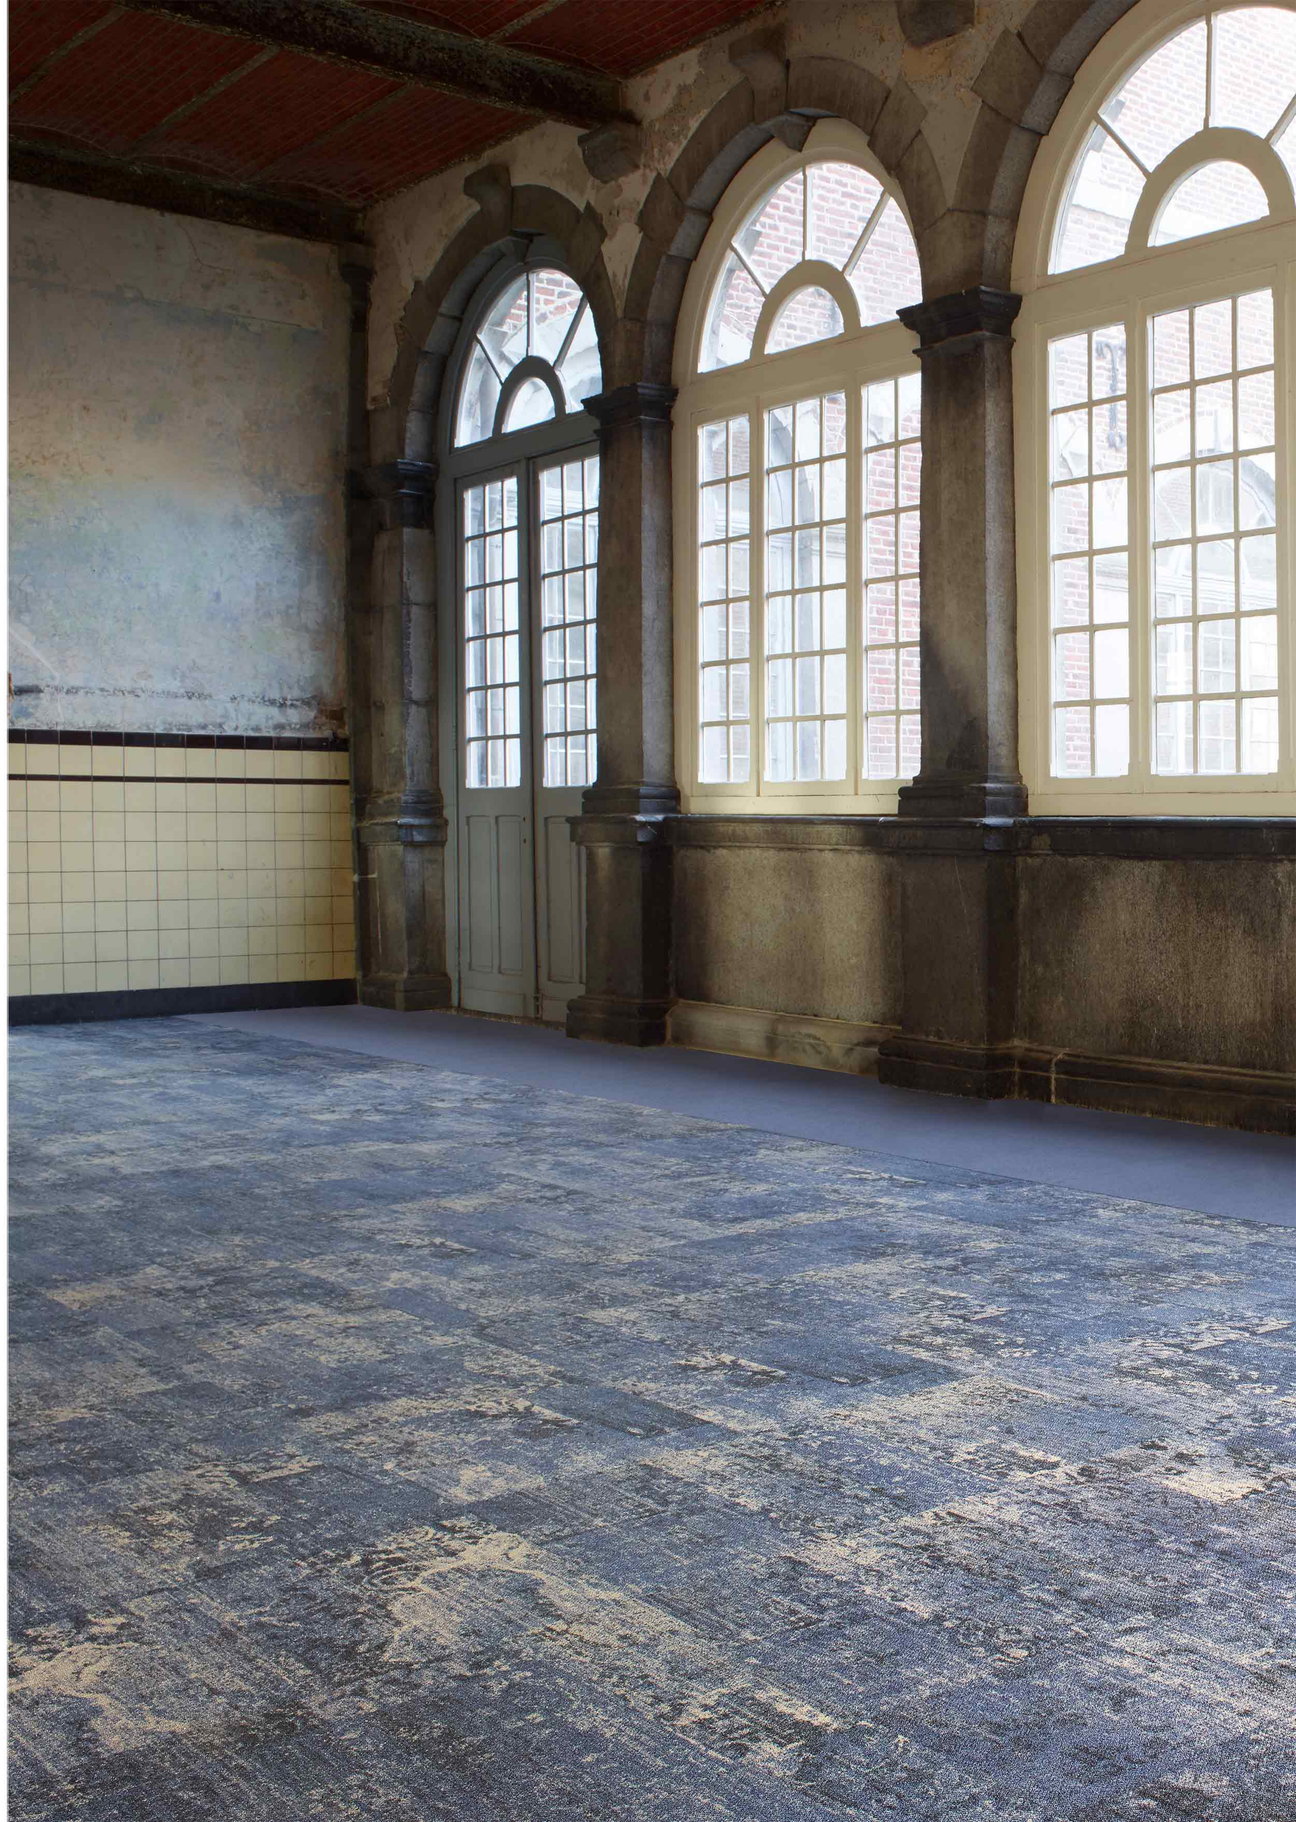

Granizo


20


41


70


75


76


77


78


82


83

Technical Specification

	Broadloom	Tile
Manufacturing Process	Tufted	Tufted
Gauge	10/1” Loop Pile	10/1” Loop Pile
Pile Material	%100 Polyamide	%100 Polyamide
Pile Weight	550 g/m²	550 g/m²
Total Weight	1.650 g/m²	3.540 g/m²
Pile Height	3,5 mm	3,5 mm
Total Height	5,5 mm	6,0 mm
Number of Tufts	181.240 /m²	181.240 /m²
Dye Method	%100 Solution Dyed	%100 Solution Dyed
Fire Behavior	$C_{fl\text{-}S1}$	$B_{fl\text{-}S1}$
Light Fastness	5	5
Wearability	4	4
Water Fastness	4	4
Use Area	Extreme / Extreme (33)	Extreme / Extreme (33)
Sound Insulation	ca. 23 dB	ca. 25 dB
Backing	Action Back	Tense Back
Width	400 cm	-
Dimension	-	50 x 50 cm

Installation Method










Silver Line


73


74


76


77


78


80


83



90

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Loop Pile
Pile Material	100% Polyamide 6
Pile Weight	785,0 g/m²
Total Weight	4.540 g/m²
Pile Height	3,0 mm
Total Height	5,0 mm
Pile Density	0.137 g/cm³
Dye Method	100% Solution Dyed
Fire Behavior	$B_{fl\text{-}s1}$
Light Fastness	≥ 5
Wearability	≥ 4
Water Fastness	≥ 4
Use Area	Extreme (33)
Backing	Tense Back
Dimension	50 x 50 cm



Installation Method






Hogo



70



74



76



77




78

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Loop Pile
Pile Material	100% Polyamide 6
Pile Weight	630,0 g/m²
Total Weight	4.380 g/m²
Pile Height	3,0 mm
Total Height	6,0 mm
Pile Density	0.111 g/cm³
Dye Method	100% Solution Dyed
Fire Behavior	B_{fl-s1}
Light Fastness	≥ 5
Wearability	≥ 4
Water Fastness	≥ 4
Use Area	Extreme (33)
Backing	Tense Back
Dimension	50 x 50 cm



Installation Method









Color Code:11

RASPBERRY




Color Code:17

BURGUNDY



Color Code:53

TUSCANY



Color Code:24

SACRAMENTO



Color Code:123

OLIVE




Color Code:174

PRUSSIAN

Fortesse



173



174


177


178


276


93


90


96


94



53


123


23


24


11


12


64



17


136



138


40


144


197


299

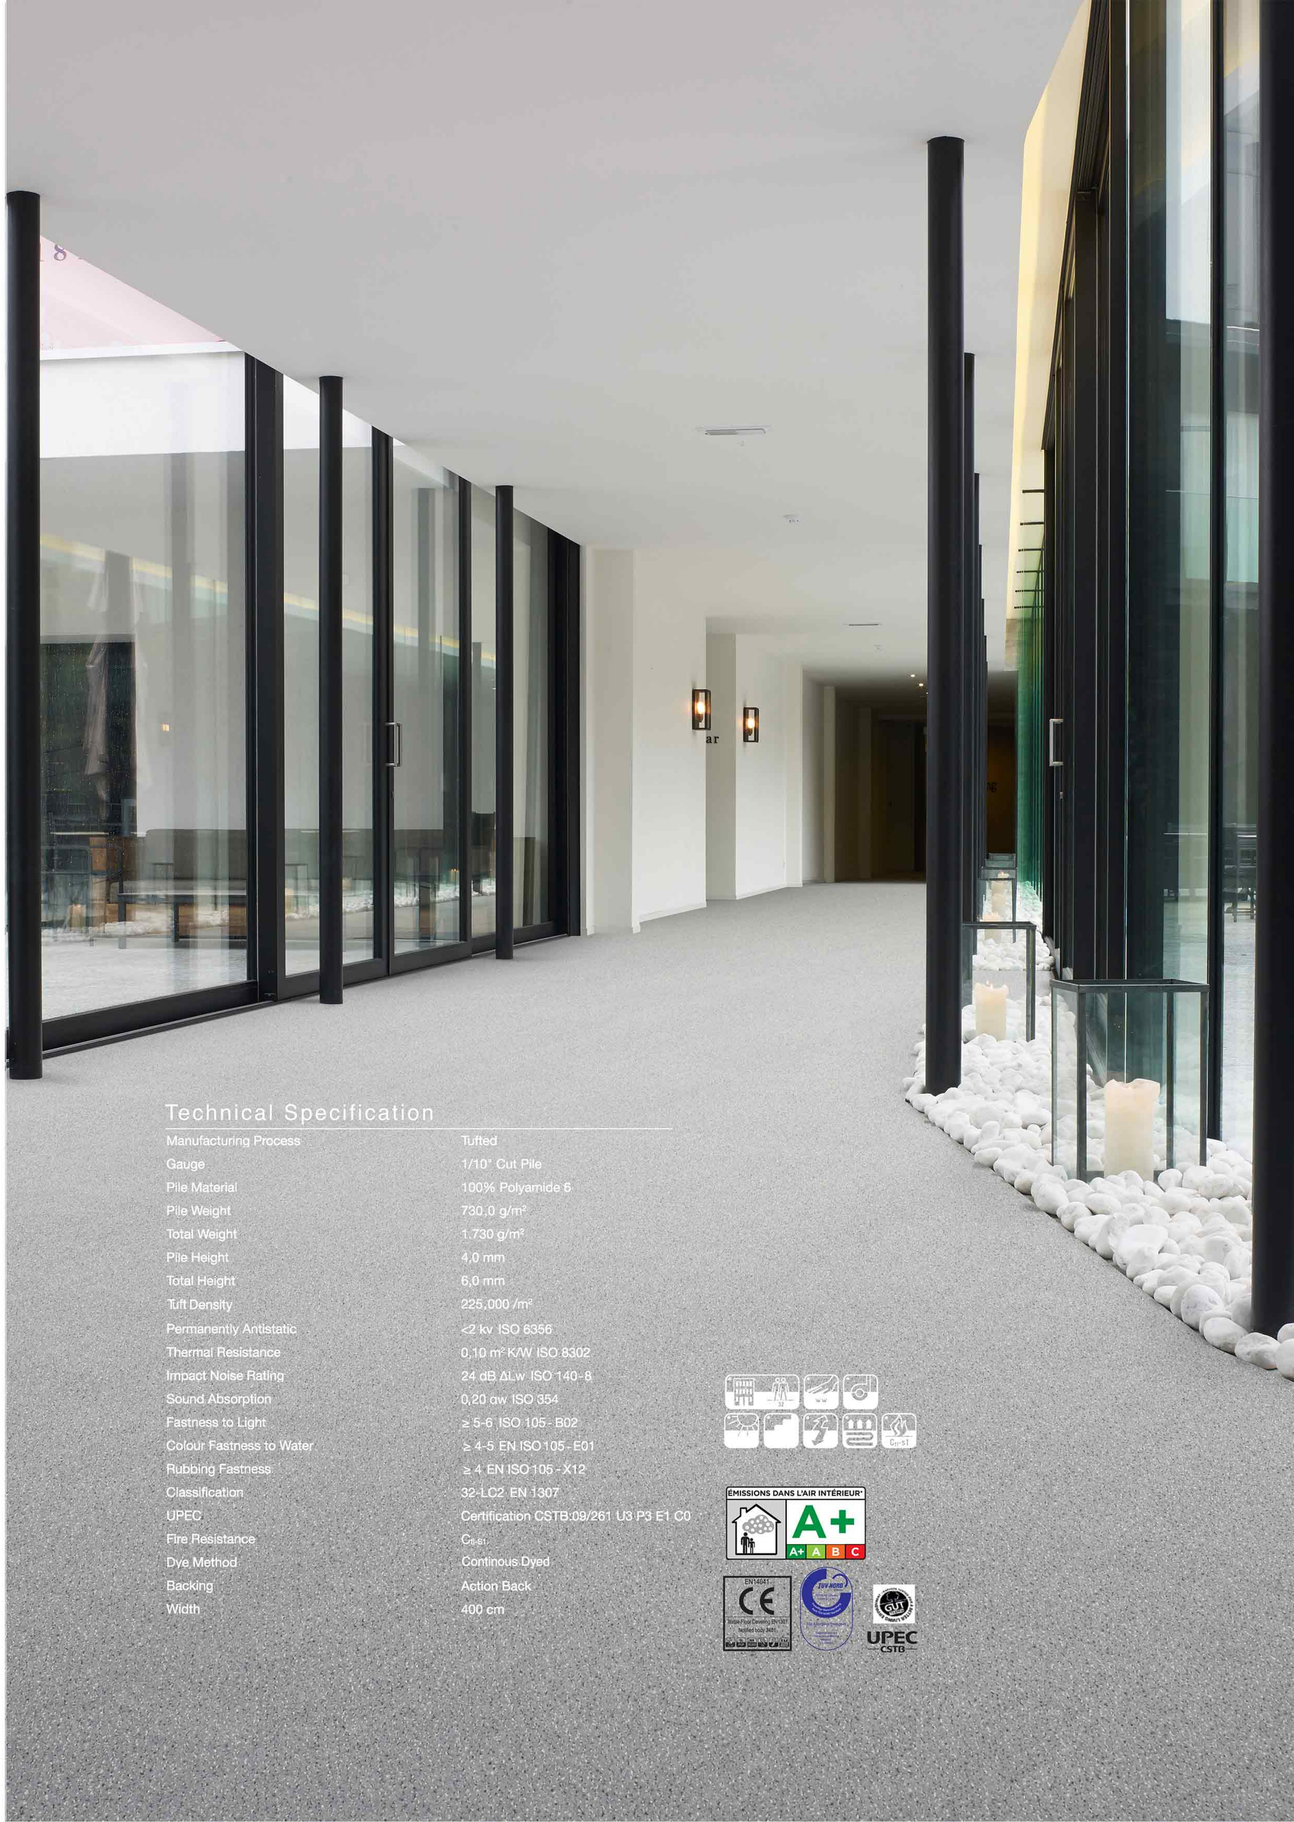

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Cut Pile
Pile Material	100% Polyamide 6
Pile Weight	730,0 g/m²
Total Weight	1.730 g/m²
Pile Height	4,0 mm
Total Height	6,0 mm
Tuft Density	225,000 /m²
Permanently Antistatic	<2 kv ISO 6356
Thermal Resistance	0,10 m² K/W ISO 8302
Impact Noise Rating	24 dB ΔLw ISO 140-8
Sound Absorption	0,20 αw ISO 354
Fastness to Light	≥ 5-6 ISO 105 - B02
Colour Fastness to Water	≥ 4-5 EN ISO 105 - E01
Rubbing Fastness	≥ 4 EN ISO 105 - X12
Classification	32-LC2 EN 1307
UPEC	Certification CSTB:09/261 U3 P3 E1 C0
Fire Resistance	C_{fl}-s1
Dye Method	Continous Dyed
Backing	Action Back
Width	400 cm

EMISSIONS DANS L'AIR INTÉRIEUR
A+
A+ A B C

Kompakt



130



180



220



480



370



640



850



895



930



980

Technical Specification

Gauge	1/10 " Loop Pile
Pile Material	%100 Polypropylene
Pile Weight	610 g/m²
Total Weight	1.782 g/m²
Pile Height	3,2 mm
Total Height	6,5 mm
Number of Tufts	186.120 /m²
Thermal Resistance	0,12 m²K/W
Sound Absorption	23 dB
Light Fastness	5-6
Water Resistance	4
Fire Behavior	$C_{fl\text{-}s1}$
Backing	Actionbac
Width	400 cm







Ondra



60 150 270 340 380



430 460 520 550 590



680 780 820 860 920

Technical Specification

Manufacturing process	Tufted
Gauge	1/10" Loop Pile-tonal
Pile material	100% Polyamide
Pile weight	530 g/m²
Total weight	2.000 g/m²
Pile height	3,0 mm
Total height	5,5 mm
Number of tufts	144.000 /m²
Flammability	ISO 13501-1 Cfl - S1
Sound absorption coefficient	ISO 354 2.000 Hz
Impact noise rating	ISO 140-8 21dB
Thermal insulation rating	ISO 8302 ≤0,17m² K/W
Boby voltage	ISO 6356 ≤2 kV
Earth discharge time	≤ 10^8 R_{EP} Ohm IEC 1340-4
Light fastness	EN ISO 105-B 02 ≥5
Water fastness	EN ISO 105-E 01 ≥4
Abrasion resistance	wet ≥3 EN ISO 105-X 12 dry≥4
Backing	Actionbac
Width	400 / 500 cm







Rondo


71


80


181


341


355


461


511


541


555


581


731


770


832


846


851

Technical Specification

Manufacturing process	Tufted		
Gauge	1/10" Loop pile		
Pile material	100% Polyamide		
Pile weight	440 gr/m²		
Total weight	1.750 gr/m²		
Pile height	2,5 mm		
Total height	5,0 mm		
Number of tufts	160.000 / m²		
Fire behavior	Cfl - S1	DIN EN	ISO 13501-1
Sound absorption coefficient	2.000 HZ	0,50	ISO 354
Impact noise rating	dB	21	ISO 140-8
Thermal insulation rating	m² K/W	≤ 0,17	ISO 8302
Body voltage	kV	≤ 2	ISO 6356
Light fastness	≥5	EN ISO	105 - B 02
Water fastness	≥4	EN ISO	105 - E 01
Abrasion resistance	wet ≥3 dry ≥4	EN ISO	105-X 12
Backing	Actinbac		
Width	400 / 500 cm		
















Caprice


35


37


38


39


40


41



42


43

Technical Specification

Manufacturing Process	Tufted
Gauge	5/64" Cut Pile
Pile Material	100% Polyamide 6
Pile Weight	630,0 g/m²
Total Weight	1.576 g/m²
Pile Height	4,2 mm
Total Height	6,4 mm
Tuft Density	294,000 /m²
Permanently Antistatic	<2 kv ISO 6356
Thermal Resistance	0,09 m² K/W ISO 8302
Impact Noise Rating	22 dB ΔLw ISO 140-8
Sound Absorption	0,20 αw ISO 354
Fastness to Light	≥ 5-6 ISO 105-B02
Colour Fastness to Water	≥ 4-5 EN ISO 105-E01
Rubbing Fastness	≥ 4 EN ISO 105-X12
Classification	33-LC2 EN 1307
Fire Resistance	$B_{fl\text{-}S1}$
Dye Method	Printed
Backing	Action Back
Width	400 cm










نشان‌ها و استانداردها



لیبل سبز CRI یک موسسه جامع فرش و موکت است. در این موسسه آزمایش های مختلف زیست محیطی بر روی فرش و موکت انجام می شود. با عضویت در این موسسه می توان استانداردهای لازم زیست محیطی را بدست آورد.



این استاندارد نشان دهنده کیفیت هوای داخلی محیط است. شاخص های میزان ترکیبات آلی فرار در محصولاتی که تولید می‌شود، یکی از 4 گرید سلامت را دارا خواهد بود. که گرید A+ کمترین میزان انتشار ترکیبات مضر برای سلامت افراد در درون ساختمان را نشان می دهد.

PVC-Free

کفپوش‌هایی که پشتیبان های PVC دارند، همواره با خود ریسک بزرگی به نام تغییرات شیمیایی پلاستیکی به همراه دارند. این واکنش‌های شیمیایی بین PVC و مواد چسبنده باقی مانده از قبل بر روی کف رخ می‌دهد.



هدف GUT بهبود مداوم کلیه جنبه های حفاظت از محیط زیست و مصرف کننده در طول عمر یک پوشش کف از زمان تولید تا نصب ، چرخه عمر استفاده و حتی بازیافت آن است. صنعت فرش اروپا با ارتقاء مداوم اهداف و استانداردهای زیست محیطی، صنعت کف سازی را متحول کرده است.



این نشان، استاندارد جهانی NSF نام دارد. این استاندارد قوانین بسیار سختگیرانه‌ای برای محافظت از سلامت عمومی دارد. در این سازمان آزمایشات گسترده تجزیه و تحلیل مواد و همه جنبه های محصول مورد بررسی قرار میگیرد.



مدرک LEED-EB یک استاندارد امریکایی در حوضه انرژی و محیط زیست میباشد.
این استاندارد در حوضه ساختمان و آپارتمان‌ها مطرح می گردد. و هدف اصلی آن حداکثر بهره وری عملیاتی و در عین حال به حداقل رساندن تأثیرات زیست محیطی است.



این علامت مربوط استاندارد منسوجاتی از جمله فرش و موکت و کالاهای قابل استفاده در اتحادیه اروپا می‌باشد. تمامی اقلام قابل عرضه در اروپا ملزم به کسب نشان استاندارد آن محصول می‌باشند.



Cradle To Cradle یک استاندارد امریکایی است که نشان دهنده قابلیت بازیافت است. رنگ سبز حلقه آن مربوط به چرخه محصولات طبیعی و زیستی است و رنگ آبی مربوط به چرخه تکنولوژی می‌باشد.



این نشان یک استاندارد جهانی است که در مورد ساختمان سبز صحبت میکند. و هدف اصلی آن کمک به خلق بناهایی است که مواد تشکیل دهنده آن قابلیت بازیافت و استفاده مجدد داشته باشند، کیفیت هوای داخلی مورد توجه قرار گرفته و از مواد غیر سمی و پایدار در آن استفاده شده باشد.



این استاندارد توسط شرکت های CEN (کمیته استاندارد سازی اروپا)، CENELEC (کمیته استاندار سازی الکترونیکی اروپا) و ETSI (موسسه استاندارد ارتباطات اروپا) ارائه می گردد. تمامی مشخصات فنی ارائه شده توسط تولید کننده باید دارای این استاندارد باشند. این استاندارد مربوط به تمامی منسوجات می‌باشد.





این استاندارد ها مربوط به کیفیت و عملکرد یک کالا می‌باشند. بر این اساس هنگامی که یک سازمان الزامات یک سیستم مدیریت کیفیت را مشخص می کند؛ باید توانایی خود را در ارائه مداوم محصولات و خدماتی مطابق با رضابت مشتری و الزامات قانونی و مقرر نشان دهد. هدف از اعطای این استاندارد ها ارتقاء رضایت مشتری از طریق استفاده مؤثر از سیستم ، از جمله فرایندهای بهبود کیفیت و اطمینان از انطباق و الزامات قانونی و مقررات قابل اجرا است.


Sisal COMMERCIAL



WE SUPPLED OVER THAN 1000 PROJECTS

مجموعه سیزال مفتخر است که کلیه محصولات خود را با توجه به نیاز مصرف کنندگان و با رعایت استانداردهای روز جهانی اعم از کیفیت و سازگاری با محیط زیست ارائه می نماید. بر همین اساس تیمی از کارشناسان فنی را در سیزال گردهم آورده ایم و ماحصل کار خود را خلق یک اثر هنری میدانیم.

اکنون پس از ۱۴ سال فعالیت مستمر و پویا، نوین سیزال صنعت به عنوان یکی از بزرگترین شرکت های ارائه دهنده موکت های اداری، هتلی و مسکونی در ایران افتخار همکاری با معتبرترین نام های تجاری ، اداری و دولتی را در کارنامه خود دارد.

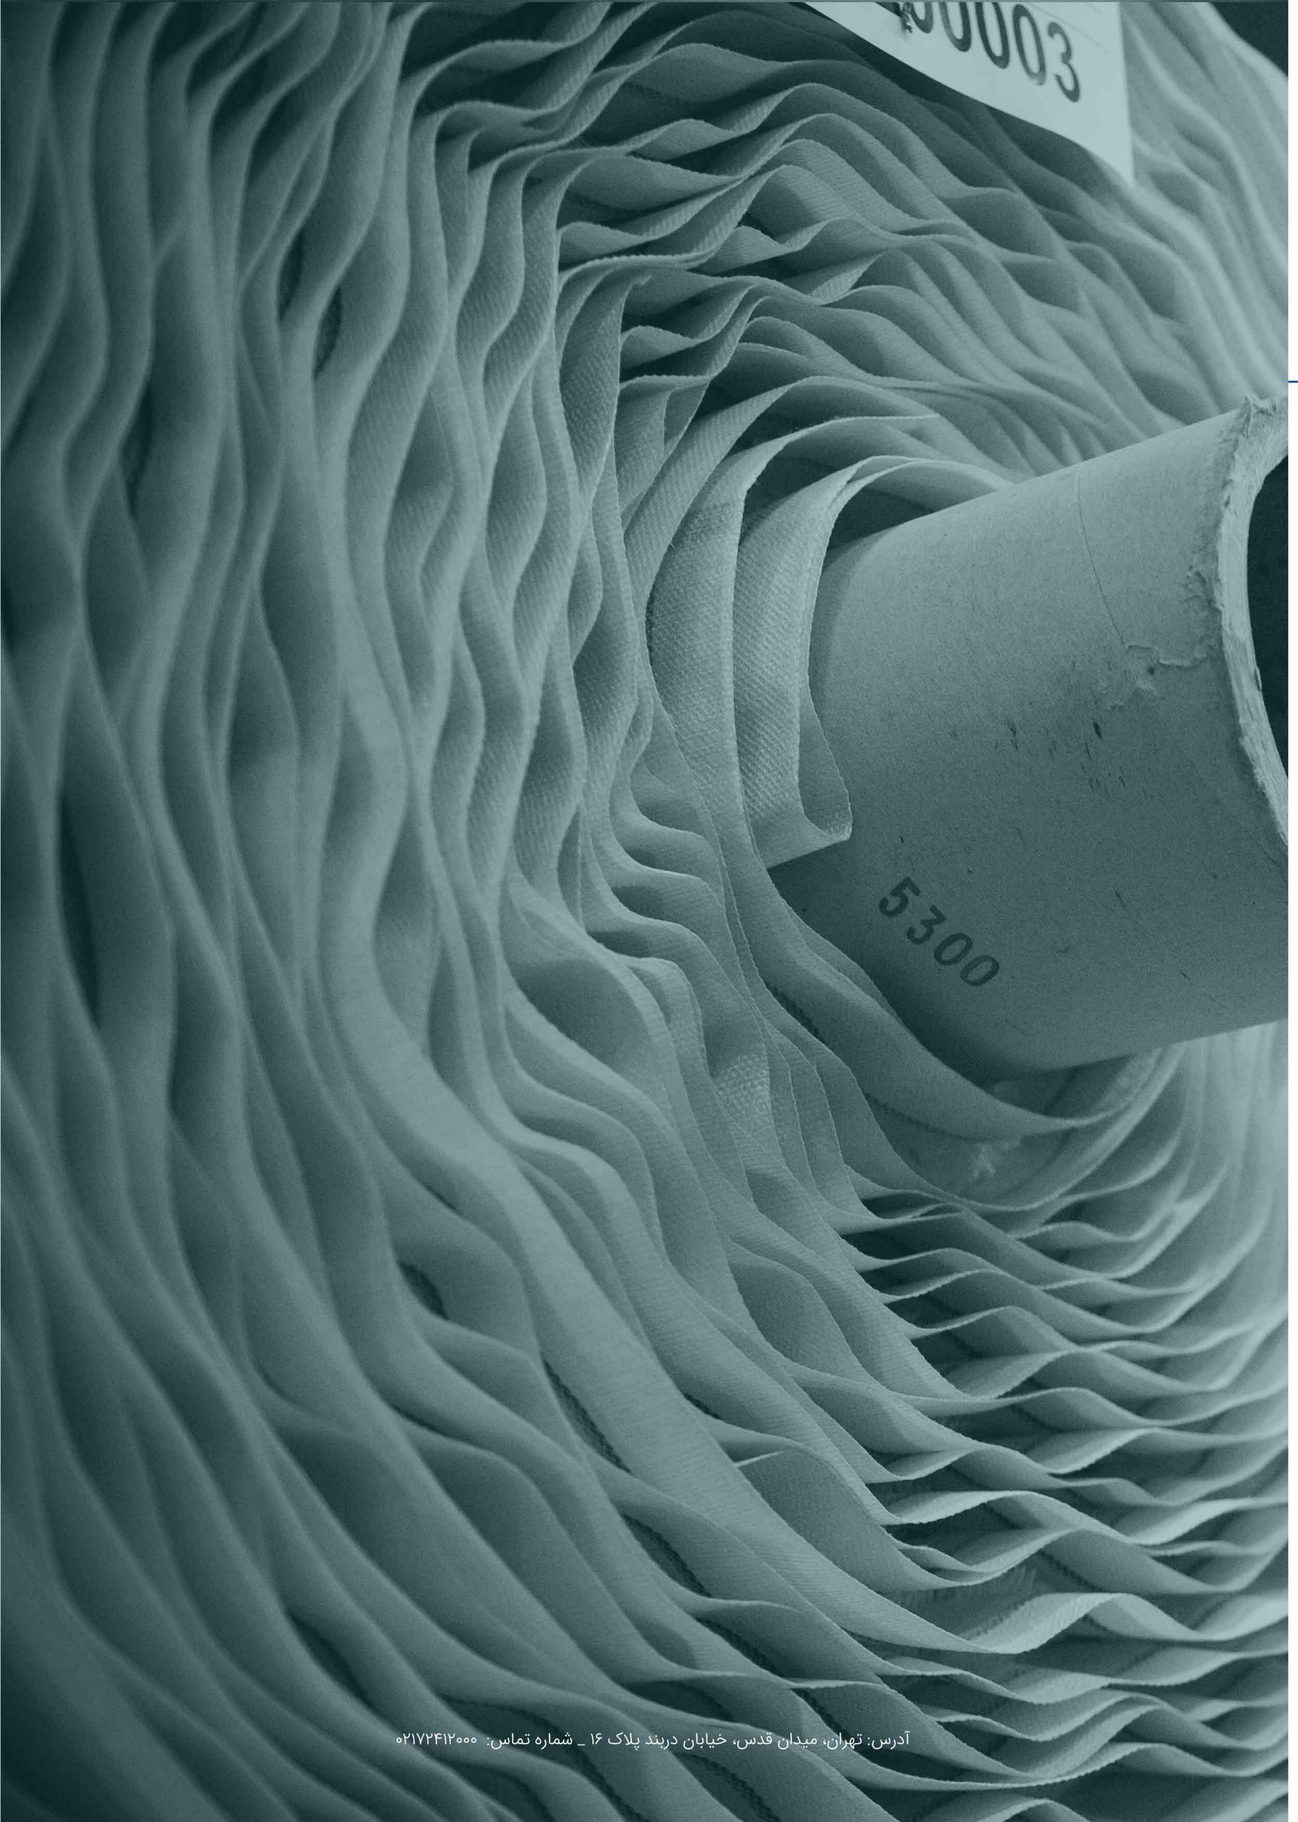

رزومه فعالیت

آدرس: تهران، میدان قدس، خیابان درند پلاک ۱۶ ـ شماره تماس: ۰۲۱۷۲۴۱۲۰۰۰

Sisal COMMERCIAL

www.sisal.ir

Novin Sisal Sanat CO / Sisal Studio All Right Reserved / August 2019 Edition